


## MECHANICAL DOCK LEVELER

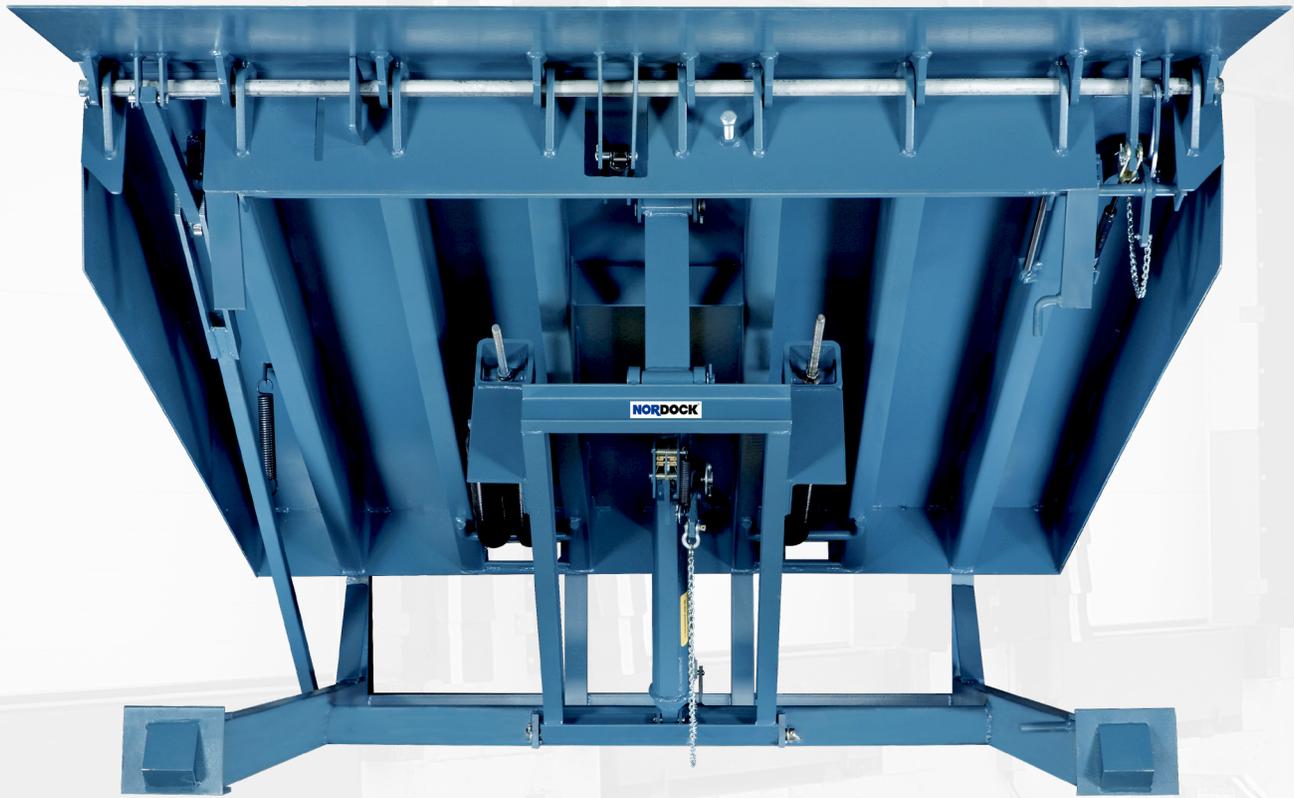

### INDUSTRIAL™ FEATURES & BENEFITS

- Exclusive Self Cleaning Lip Lug & Header Plate Design Ensures Maximum Strength & Durability with 20-Year Warranty
- Easy Transfer Full Width Fixed Rear Hinge with No Pinch Point and 20-Year Warranty
- Smooth & Easy Activation with Walk Down Yieldable Lip Extension
- 33% Deck to Beam Weld Pattern on Both Sides of Beam Provides Superior Strength
- Open Frame Design for Easy Pit Cleaning
- Six Rear Structural Frame Supports
- Lock Out Tag Out Capable Maintenance
- Center Positioned Holdown Eliminates Deck Twist for Level Storage
- Retracting Solid Steel Deck Legs with Below Dock End Load Control
- Front & Rear Hinge Rods are Zinc Coated & Factory Coated with Anti-Seize Lubricant
- Independent Deck and Lip Maintenance Supports with Lock Out Tag Out Capability
- Working Range Structural Welded Side Guards
- Additional Center Beam Deck Support for 3 Wheel Lift Trucks
- Two Laminated Dock Bumpers Included

# SPECIFICATIONS

## DESCRIPTION

The INDUSTRIAL™ Series mechanical dock levelers are the ultimate in strength, ease of use and reliability.

Equipped with an exclusive lip lug and header plate design, easy release holdown with dual pawls and full yielding walkout lip extension for a smooth and efficient operation.

Available in capacity ratings from 25,000 to 60,000 lbs. in 5,000 lb. increments and standard nominal sizes of 6 ft. wide x 6 ft. long to 7 ft. wide x 10 ft. long.

Standard features include working range side guards, retractable deck stop legs, security night lock and a comprehensive warranty.

## OPERATION

The operator releases the holdown at the rear of the platform until the deck is raised and stopped.

The operator walks the platform down extending the lip onto the truck bed.

The deck will float up and down with the truck during loading.

The standard 16" long lip will extend out and engage a truck bed 12" above and below floor level.

## CONSTRUCTION

The platform is a unitized welded structure with 33% deck to beam weld pattern, welds on both sides of the beam, header plate and lug connections for maximum strength.

The deck plate, lip plate, beam sections and lugs are constructed of minimum 55,000 PSI yield material.

A standard center deck beam and welded side guards provide additional deck plate support. The continuous rear hinge provides 4" of side-to-side tilt with no pinch point.

The 19" high frame has six solid steel rear supports, an open design for pit cleaning, and a night lock that prevents illegal entry when the door is closed. The front and rear hinge rods are SAE 1045 material, zinc coated with factory applied anti-seize lubricant.

## WARRANTY

NORDOCK® guarantees that the INDUSTRIAL™ Series dock levelers will perform as described and to the full satisfaction of the purchaser for one-year from date of receipt or NORDOCK® will repair, replace or remove the product and refund the purchase price.

In addition, the front and rear hinge assemblies are guaranteed, under specified guidelines, for a period of Twenty-Years.

All NORDOCK® dock levelers are designed to exceed ANSI requirements and properly applied comes with a 10-Year structural warranty.

### SUPERIOR WARRANTIES

**20**  
YEAR  
Exclusive Lip  
Lug and  
Header Plate

**20**  
YEAR  
Full Width  
Rear Hinge

**10**  
YEAR  
Structural

**1**  
YEAR  
Comprehensive



[www.nordockinc.com](http://www.nordockinc.com) - [sales-nordock@iwsolutions.com](mailto:sales-nordock@iwsolutions.com) - Toll Free: 1-866-885-4276

NORDOCK® Inc. reserves the right to make changes to specifications without notice or obligation. NORDOCK® products are covered by numerous U.S. and Foreign patents and pending applications.

# SUBMITTAL

## PROJECT INFORMATION

Job Name: \_\_\_\_\_

Address: \_\_\_\_\_

General Contractor: \_\_\_\_\_

Distributor: \_\_\_\_\_

Model: \_\_\_\_\_

Quantity: \_\_\_\_\_

Capacity: 25K 30K 35K 40K 45K 50K 60K

Integrated Control: Yes No

Vehicle Restraints: MTL: 100 200 230 250 300

ATL: 400 450 500 900 | AR-10K AR-20K

Other: \_\_\_\_\_

## CERTIFIED FOR CONSTRUCTION

Date: \_\_\_\_\_

Company: \_\_\_\_\_

Address: \_\_\_\_\_

## MODELS & NOMINAL DIMENSIONS

MODEL*	WIDTH	LENGTH
NM-66	6' 0"	6' 0"
NM-68	6' 0"	8' 0"
NM-610	6' 0"	10' 0"
NM-6.56	6' 6"	6' 0"
NM-6.58	6' 6"	8' 0"
NM-6.510	6' 6"	10' 0"
NM-76	7' 0"	6' 0"
NM-78	7' 0"	8' 0"
NM-710	7' 0"	10' 0"



\*Add capacity required from 25,000 to 60,000 lbs. Example: NM-68-35.

Contact a sales representative at **1-866-885-4276** or email **sales@nordockinc.com** for more information.

# OPTIONS & ACCESSORIES

## ADDITIONAL OPTIONS & ACCESSORIES

- 18" or 20" Long Lip
- Brush & ALL-SEAL™ Weather Seal Systems
- Self Forming Pour in Pans & Curb Angle Sets
- Full Range Telescoping Side Guards
- Dock Lights
- Pit Shim Kits



[www.nordockinc.com](http://www.nordockinc.com) - [sales-nordock@iwsolutions.com](mailto:sales-nordock@iwsolutions.com) - Toll Free: 1-866-885-4276

NORDOCK® Inc. reserves the right to make changes to specifications without notice or obligation. NORDOCK® products are covered by numerous U.S. and foreign patents and pending applications.